

Labelling group PB

The labelling group PB (Petit Brio) is the natural evolution of the Brio head. Within its strengths stand out its compactness, reliability and adaptability to the most diverse projects.

Technical features:


- Max. label reel width: 115 mm / 195 mm
- Max. label reel diameter: 300 mm
- Label reel inside diameter: 76 mm
- Maximum precision: 0,3 mm
- Power supply: 230 V, 50 Hz
- Consumption: 350 W
- Certification: C.E.

General features:

- Integrated electronics inside labelling group
- Multilingual user-friendly interface
- Synchronised speeds up to 50 m/min
- End reel control
- Hot foil coder (Catprint) control
- Adjustment in mm of label/foil predisensing and position
- Adjustment in mm/min of the label dispensing rate
- Temperature, time and hot foil coder (Catprint) ribbon adjustment

Options:

- Automatic unwinder
- Two labelling group connection for non-stop labelling
- Movable control panel, possibility of integration in another control box
- Adjustable brackets

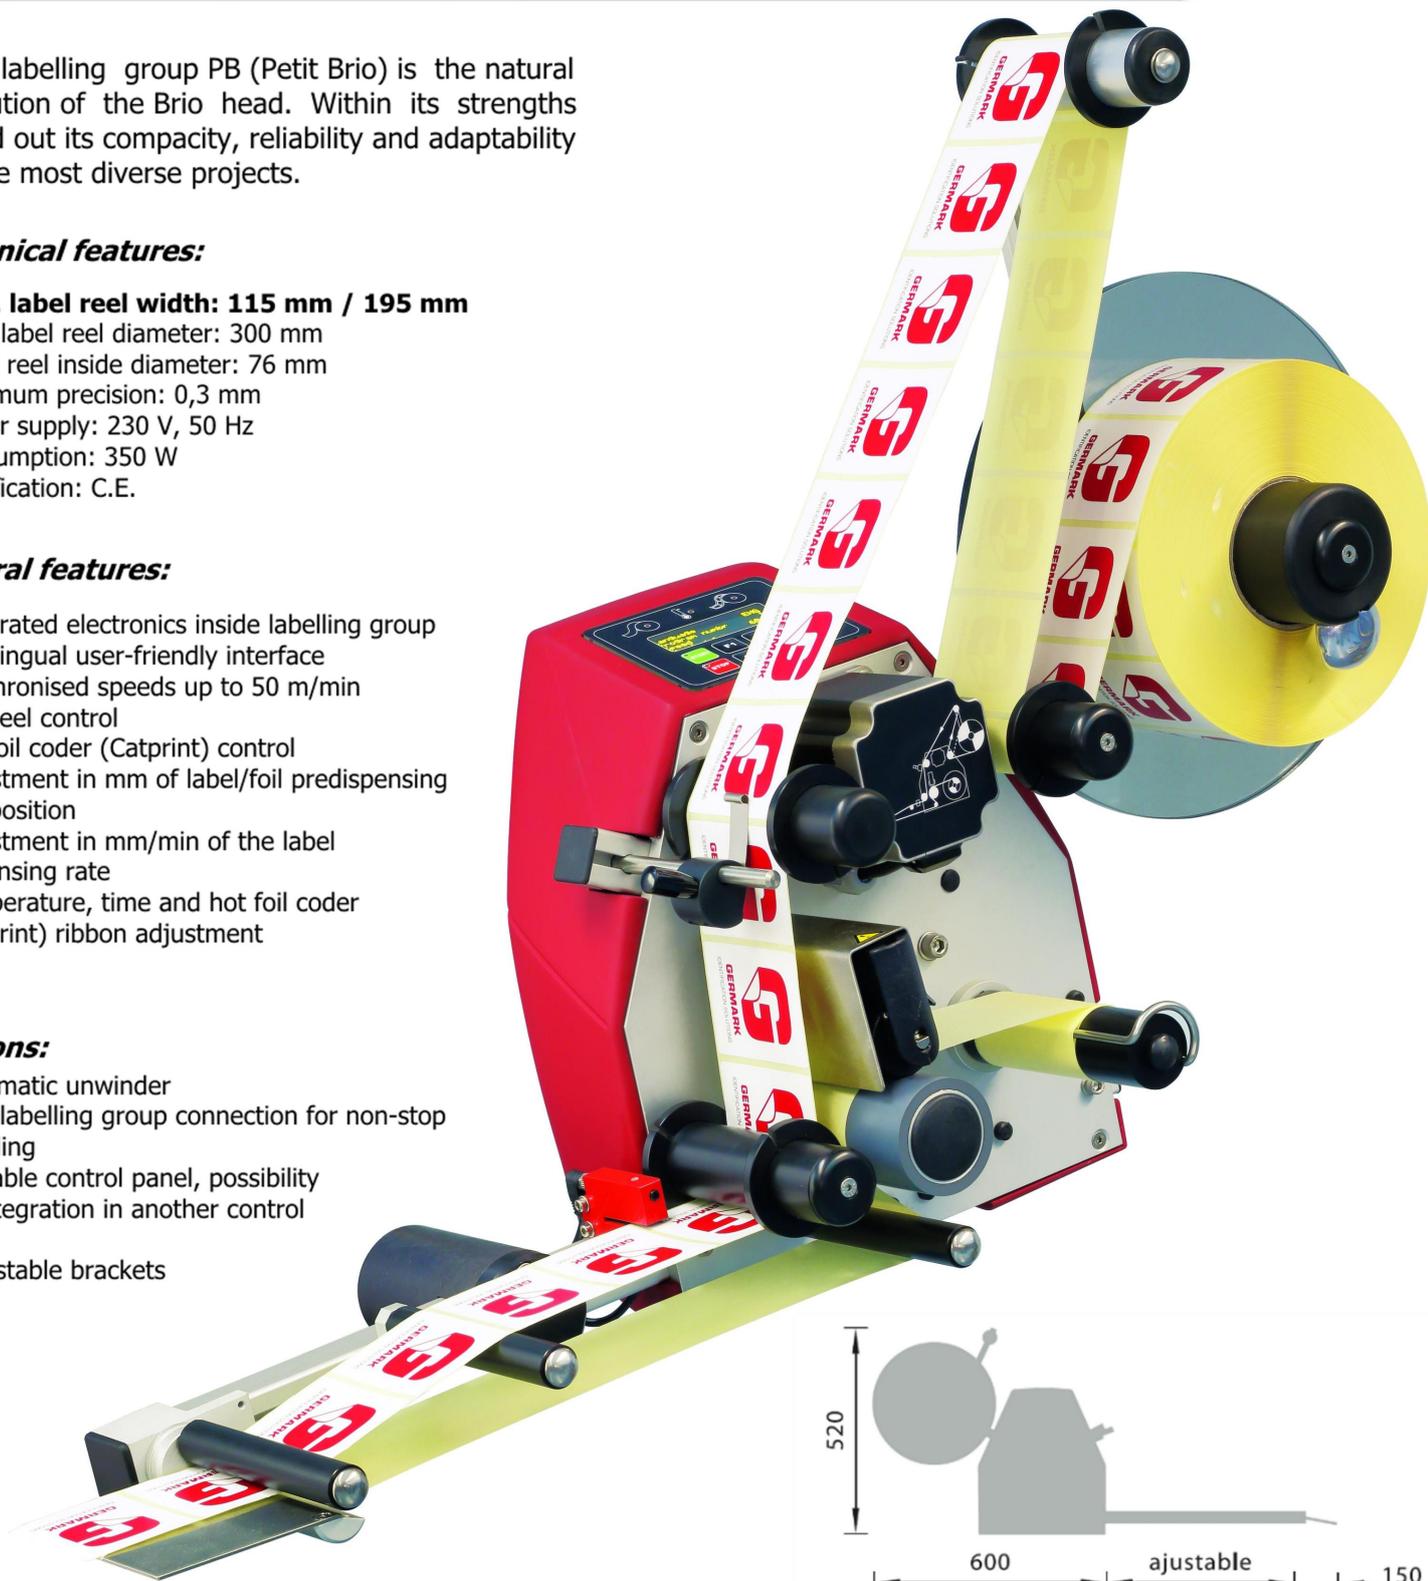

Systems Division

Avda. La Fama, 50 08940 Cornellá de Llobregat (Barcelona) - Spain

Tel. +34-93 475 14 00 www.germark.com/en/labelling-machines

v-4.0